

# A novel N-halamine monomer for preparing biocidal polyurethane coatings

S D Worley,<sup>1</sup> F Li,<sup>1,2</sup> R Wu,<sup>1</sup> J Kim,<sup>3</sup> C-I Wei,<sup>3</sup>  
J F Williams,<sup>2</sup> J R Owens,<sup>4</sup> J D Wander,<sup>4</sup>  
A M Bargmeyer<sup>5</sup> and M E Shirliff<sup>5</sup>

<sup>1</sup> Department of Chemistry, Auburn University, Auburn, Alabama 36849, USA

<sup>2</sup> Vanson-Halosource, Redmond, Washington 98052, USA

<sup>3</sup> Department of Nutrition and Food Science, Auburn University, Auburn, Alabama 36849, USA

<sup>4</sup> AFRL/MLQF, Tyndall AFB, Florida 32403, USA

<sup>5</sup> Center for Biofilm Engineering, Montana State University, Bozeman, Montana 59718, USA

This paper is developed from a paper presented at the Hygienic Coatings Conference in Brussels, Belgium, in July 2002

## Summaries

### A novel N-halamine monomer for preparing biocidal polyurethane coatings

A novel N-halamine monomer has been prepared which can be copolymerised with a commercial water-borne acrylic polyol and a commercial isocyanate to produce a polyurethane coating which can be applied to a broad variety of surfaces. After curing, the coating can be chlorinated with a source of free chlorine, such as bleach, to render it biocidal. Once the coating loses its chlorine loading, and hence its biocidal activity, regeneration is possible by further exposure to free chlorine. In one experimental observation a coating on a wall retained its biocidal activity for more than six months. The biocidal coating should have many applications, for example, in medical facilities, in food preparation areas, in the prevention of biofouling in aqueous and humid environments, etc.

### Un nouveau monomère à la N-halamine pour la préparation de revêtements polyuréthaniques biocides

Un nouveau monomère à la n-halamine a été préparé qui peut être copolymérisé avec un polyol acrylique hydrodiluable commercial et un isocyanate commercial afin de produire un revêtement polyuréthanique qui peut être appliqué à une large variété de surfaces. Après séchage le revêtement peut être chloré en utilisant une source de chlore libre, telle que l'eau de Javel, pour le rendre biocide. Une fois que le revêtement perd sa charge de chlore, et donc son activité biocide, la régénération est possible par le moyen d'une autre exposition au chlore libre. Au cours d'une certaine observation d'expérience on a noté que le revêtement d'un mur a retenu son activité biocide pendant plus de six mois. Le revêtement biocide devrait avoir de nombreuses applications, par exemple, dans les établissements médicaux, dans les lieux de préparation des produits alimentaires, dans le domaine de la prévention de la biocontamination des environnements humides ou aqueux, etc.

### Ein neuartiger N-Balaminmonomer für die Herstellung von Biozid-haltigen Polyurethanlacken

Wir haben einen neuartigen N-Balaminmonomer hergestellt, der durch ein handelsübliches acrylisches Polyol und ein Isocyanat copolymerisiert werden kann. Der so erhaltene Lack kann auf eine weite Reihe von Oberflächen aufgetragen werden. Nach dem Härteprozess kann der Lack mit einem Produzenten von freiem Chlor wie Bleiche chloriniert werden, um die Biozidwirkung zu aktivieren. Da der Lack mit der Zeit seinen Chlorgehalt verliert und damit seine Wirkungskraft, kann diese Behandlung kann nach Bedarf wiederholt werden. Eines unserer Experimente zeigte dass der Lack seine Biozidwirkung für über sechs Monate beibehalten kann. Dieser Biozidlack dürfte vielfältig Anwendung finden, z. B. in Krankenhäusern, Küchen, zum Verhindern von Pilzbefall in feuchten Räumen und so weiter.

#### For correspondence contact

S D Worley

Department of Chemistry, Auburn University, Auburn, Alabama 36849, USA

Tel: +1 334-844-6980

Fax: +1 334-844-6959

Email: worlesd@auburn.edu

Copyright OCCA 2003

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>2003</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2003 to 00-00-2003</b>	
4. TITLE AND SUBTITLE <b>A novel N-halamine monomer for preparing biocidal polyurethane coatings</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>AFRL/MLQF,Tyndall AFB,FL,32403</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>Surface Coatings International Part B: Coatings Transactions, Vol.86, B4, 247-328, December 2003</b>					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>6</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

## Introduction

Work at Auburn University since 1980 has focused on the development of novel biocidal N-halamine derivatives.<sup>1</sup> Water-soluble, cyclic N-halamine derivatives such as 1,3-dihalo-5,5-dimethylhydantoin and halogenated isocyanurates (eg Trichlor and Dichlor) have been employed as biocides for industrial and recreational water uses for many years, but the water-soluble N-halamine compounds produced at Auburn University (oxazolidinones and imidazolidinones) are unique because of their long-term stability in aqueous solutions and in dry storage (see Figure 1). This exceptional stability is a result of their chemical structures: all have electron-donating alkyl groups substituted on the heterocyclic rings adjacent to the oxidative NCl or NBr moieties, which prohibit significant release of 'free halogen' into aqueous solutions. The combined N-halamines thus serve as contact biocides.

Although combined N-halamine monomers generally require longer contact times at a given halogen concentration than 'free halogen' to inactivate pathogens, it has been demonstrated in these laboratories that it is possible to concentrate N-halamine moieties on insoluble polymers, thus producing a substantial reservoir of combined halogen for enhanced disinfection purposes. Furthermore, the functionalised N-halamine polymers are superior in overall performance (taking into account biocidal efficacy, stability at varying pHs, and in the presence of organic receptors, rechargeability, lack of toxicity, and general cost) to other biocidal polymers which have been developed and marketed over the years, such as halogenated poly(styrene-divinylbenzene) sulphonamides,<sup>2</sup> polymeric phosphonium materials,<sup>3</sup> and polymeric quaternary ammonium compounds.<sup>4</sup>

Several commercial polymers have been functionalised with N-halamine moieties, rendering them biocidal upon surface contact with pathogens. These include: cellulose,<sup>5,6</sup> nylon,<sup>6,7</sup> PET (polyethylene terephthalate),<sup>6,8</sup> Kraton rubber,<sup>9</sup> various surface coatings,<sup>10</sup> and the N-halogenated poly(styrene) hydantoins.<sup>11-15</sup> The latter polymers are granular solids which are insoluble in water and which are packed into glass columns which function as cartridge filters. It was observed that the filters inactivated numerous species of bacteria, fungi, and even rotavirus in just seconds of contact time in flowing water.<sup>11-15</sup> Also, it was observed that the columns did not leach out decomposition products into the water,<sup>14</sup> and that the free chlorine and bromine concentrations leached into the flowing water were less than 0.1mg/L and less than 2.0mg/L, respectively. Furthermore, once the halogen supply was exhausted through various loss processes, it could be replenished on the polymers by simply exposing them to flowing aqueous free halogen (eg sodium hypochlorite bleach for the chlorinated derivative). It appears that the chlorinated polymer will be useful for potable water disinfection applications, and that the brominated poly-

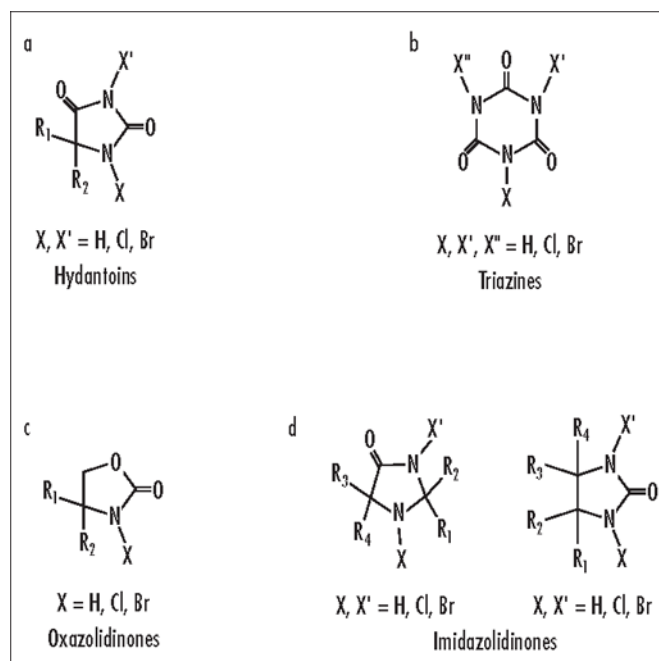


Figure 1: Water-soluble heterocyclic monomers used in the modification of polymers to render them biocidal

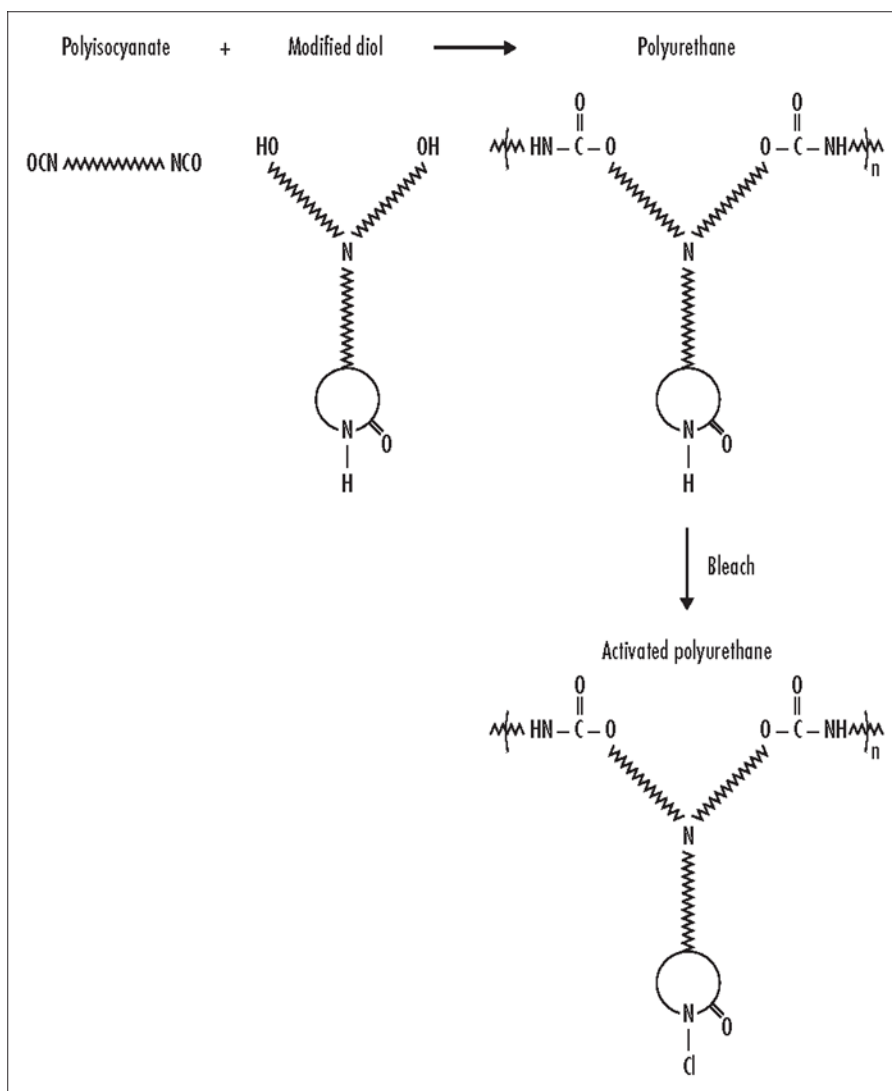


Figure 2: The concept of a biocidal polyurethane coating

mer will work well in disinfecting recreational water sources. Recently the products have been produced in the form of porous beads to enhance flow properties.

This work represents an extension of technology developed at Auburn University to the preparation of biocidal polyurethane coatings through the functionalisation of a reactive diol with a hydantoin moiety which can then be copolymerised with commercial polyols and isocyanates to form polyurethane. An application of free halogen (eg with household bleach) will then render the coating biocidal. The concept is illustrated in Figure 2, and the structure of the actual diol which has been developed in this work is shown in Figure 3.

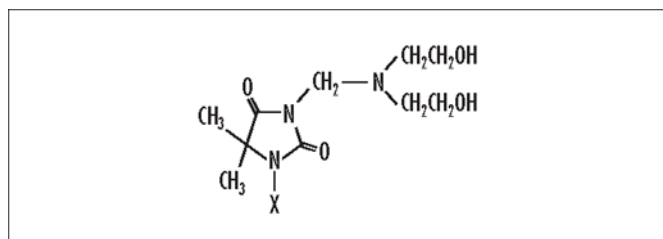


Figure 3: Diol monomer developed for polyurethane coatings

## Experimental procedure

### Preparation of diol monomer

The unhalogenated diol monomer was prepared by the reaction of 132.1g (1.0 mol) of 5,5-dimethylhydantoin, 106.2g (1.0 mol) of diethanolamine, and 81.16g (1.0 mol) of 37% formaldehyde solution in 400ml of methanol at an ambient temperature for two hours. Alternatively, it could be prepared by reaction of 3-hydroxymethyl-5,5-dimethylhydantoin with diethanolamine in methanol at 75°C. The water byproduct and methanol solvent were removed for characterisation purposes by vacuum evaporation. The viscous residue produced was then dissolved in ethyl acetate, and anhydrous sodium sulphate was added for further drying purposes. Following the removal of the sodium sulphate by filtration, the solution was refrigerated. After 12 hours, a white solid product precipitated from the ethyl acetate solution. The product, which was removed by filtration from the cold solution, exhibited a melting point of 74 to 76°C and was produced in 61 to 84% yield; it was identified as 5,5-dimethyl-3-(N,N-di-β-hydroxyethylaminomethyl)hydantoin (see Figure 3). <sup>1</sup>H NMR (DMSO-d<sub>6</sub>) δ 1.28 (6H), 2.65 (4H), 3.40 (4H), 4.31 (2H), 4.39 (2H), 8.28 (1H); <sup>13</sup>C NMR (DMSO-d<sub>6</sub>) δ 24.8, 54.5, 57.6, 57.8, 59.2, 156.2, 178.7; IR (KBr) 1295, 1346, 1439, 1710, 1764, 2814, 2974, 3227, 3474 cm<sup>-1</sup>.

### Preparation and testing of polyurethane coatings

To 10g of commercial water-borne acrylic polyol formulation was added 0.7g of the unhalogenated diol monomer, prepared as described above, stirring until dissolution was complete. Then 2.45g of commercial isocyanate formulation was thoroughly mixed in, followed by the addition and mixing of 2.10g of distilled, deionised water. The resulting formulation was immediately spread on to the surfaces of several plastic Petri dishes, which were dried in air at an ambient temperature. The coatings were dry to the touch within four to five hours, but were allowed to cure further overnight at an ambient temperature before further treatment. The coatings were then chlorinated by exposure to commercial bleach (5.25% sodium hypochlorite) at several concentrations for three to twelve hours. After rinsing thoroughly with chlorine-demand-free water, the coatings were dried in air for six hours and then

analysed for bound oxidative chlorine using an iodometric thio-sulphate titration procedure.

Other coatings prepared in the same manner at the same time (cut to squares of 6.45cm<sup>2</sup> area) were challenged with *Staphylococcus aureus* bacteria for contact times of two hours. This was done by placing 25μl of bacterial suspension between two coated squares. Following quenching of disinfectant action with 0.02N sodium thiosulphate in a vortexed solution in a beaker, serial dilutions of the vortexed solution were plated on to trypticase soy agar, incubated for 48 hours at 37°C, and colony counts were made. Unchlorinated coatings served as controls. The analytical and microbiological evaluations were performed as a function of chlorination concentration and of time following chlorination.

In another experiment, strips of unhalogenated coatings were deposited on the stall doors of a rest-room at Tyndall AFB. Half of the strips were chlorinated with diluted bleach (20%) with the damp strips being thoroughly rinsed with water after five minutes; the other half were not chlorinated to serve as controls. After three months, sterile cotton swabs were used to challenge the strips with 9μl aliquots of between 10<sup>6</sup> and 10<sup>7</sup>CFU/ml of *Pseudomonas pseudoalcaligenes* JS45, and then again after six months without rechlorination. After contact times of five minutes, sterile cotton swabs moistened with sterile buffer were used to recover bacteria from the test sections. The recovered bacteria were inoculated on to trypticase soy agar plates, which were incubated at 30°C for 38 hours before colony enumeration.

Finally, polycarbonate strips were coated with the polyurethane and placed in a biofilm reactor at the Center for Biofilm Engineering at Montana State University; uncoated strips served as controls. Water containing nutrients which support biofilm growth was flowed through the reactor at a shear stress simulating a flow of 1ft/s (30.48cm/s) in a four-inch pipe. After five weeks substantial biofilm development had occurred on all strips. At that time the water was doped with 1.0 to 1.2mg/l of free chlorine, and the flow was continued for five more weeks with the behaviour of the biofilms on the strips caused by planktonic bacteria continuously monitored microbiologically.

## Results and Discussion

The data for *S aureus* inactivation are presented in Tables 1 and 2. Table 1 shows that a complete inactivation of the bacteria (>4.5 logs) in two hours of contact time was obtained after 5% and 10% bleach solutions were used for chlorination for three hours, and a 3.0 log inactivation occurred following exposure of the coating to 1% bleach solution for three hours. This was consistent with the trend of Cl atoms/cm<sup>2</sup> determined analytically for the three types of samples.

**Table 1. Biocidal efficacy as a function of chlorination concentration**

Bleach concentration in water (%) <sup>a</sup>	Cl atoms/cm <sup>2</sup> surface	Log reduction <i>S aureus</i>
10	1.34 x 10 <sup>17</sup>	>4.5 (no growth)
5	9.13 x 10 <sup>16</sup>	>4.5 (no growth)
1	3.69 x 10 <sup>16</sup>	3.0

a Household bleach containing about 5.25% sodium hypochlorite

Table 2 shows that the coatings retained their biocidal efficacies for at least 14 days (longer times were not tested in this particular experiment). It has also been demonstrated that biocidal

**Table 2. Coating chlorine loadings and biocidal efficacies as a function of time following chlorination with 100% bleach for 12 hours**

Time after chlorination in days	Cl atoms/cm <sup>2</sup> surface	Log reduction S aureus
0.25	$3.53 \times 10^{17}$	>4.7 (no growth)
4.0	$6.78 \times 10^{16}$	>4.7 (no growth)
14.0	$2.33 \times 10^{16}$	>4.7 (no growth)

efficacy can be regenerated, once lost, by re-exposure to free chlorine solutions.

The results of the rest-room stall experiment performed at Tyndall AFB were very gratifying. No viable bacteria were recovered from the polyurethane strips which had originally been chlorinated even after six months without recharging. Viable bacteria were recovered from the control strips which had not been chlorinated.

Also gratifying were the results of the biofilm reactor study at Montana State University. When the small amounts of free chlorine ( $1.0$  to  $1.2 \text{ mg/L}$ ) were present in the flowing water, the strips containing the polyurethane coating yielded 1 to 2 logs fewer biofilm microorganisms than did the polycarbonate strips not containing a polyurethane coating. Figure 4 contains photographs showing the polycarbonate strips with and without the polyurethane coating. The polycarbonate slides were subjected to biofilm formation over a period of five weeks in the presence of about  $1 \text{ mg/L}$  free chlorine.

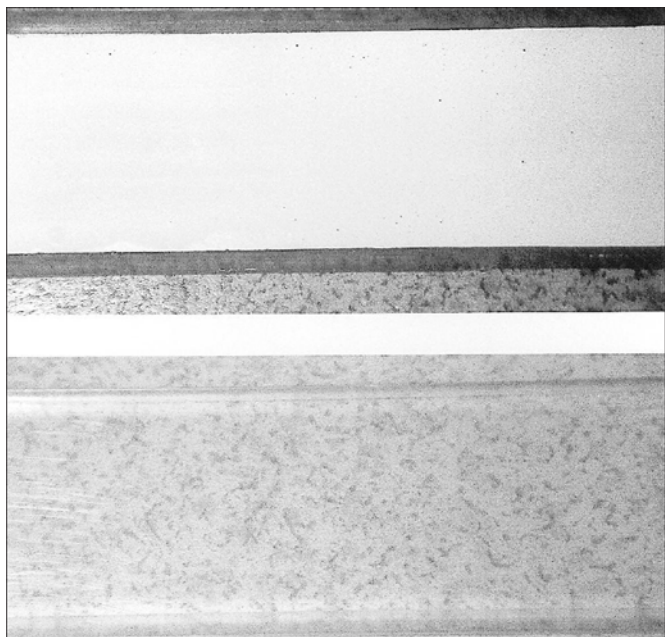


Figure 4: Polycarbonate annular reactor coupons used in the biofilm prevention study; the coupons contain the biocidal polyurethane coating (top) and no coating (bottom)

## Conclusions

A novel hydantoinyl diol monomer has been prepared in a simple, inexpensive process. The monomer has been copolymerised with a commercial water-borne acrylic polyol and a commercial isocyanate to produce a polyurethane coating. The cured coating can be chlorinated with a source of free chlorine, such as household bleach, to render it biocidal. The coating loses its chlorine loading gradually, but it can be regenerated by further exposure to free chlorine. The biocidal coating should

have many applications, including use in medical facilities, in food preparation areas, in prevention of biofouling, etc.

## Acknowledgments

The authors acknowledge the financial support of the US Air Force, AFRL/MLQF, Tyndall AFB, through contract number FO8637-01-C-6004, Vanson-Halosource Corporation, and Tnemec Corporation for this work. They also acknowledge experimental support and discussions with S Nishino of Tyndall AFB and H Lomasney and R Briand of Tnemec Corporation (H Lomasney is now with Isotron Corporation).

## References

- Worley S D and D E Williams, 'Halamine water disinfectants', *Crit Rev Environ Contrl*, **18**, 133, 1988; Worley S D and G Sun, 'Biocidal polymers', *Trends Polym Sci*, **4**, 364, 1996
- Emerson D W, D T Shea and E M Sorensen, 'Functionally-modified poly-styrene-divinylbenzene: Preparation, characterisation and biocidal action', *Ind Eng Chem Prod Res Dev*, **17**, 269, 1978; Emerson D W, 'Polymer-bound active chlorine: Disinfection of water in a flow system: Polymer supported reagents. 5', *Ind Eng Chem Res*, **29**, 448, 1990; Emerson D W, 'Slow release of active chlorine and bromine from styrene-divinylbenzene copolymers bearing N,N-dichlorosulfonamide, N-chloro-N-alkylsulfonamide, and N-bromo-N-alkylsulfonamide functional groups. Polymer supported reagents. 6', *Ind Eng Chem Res*, **30**, 2426, 1991; Bogoczek R and E K Balawejder, 'N-monohalogeno- and N,N-dihalogeno-poly(styrene-co-divinylbenzene)sulfonamides (P-SO<sub>2</sub>NXNa, P-SO<sub>2</sub>NX<sub>2</sub>)', *Polym Commun*, **27**, 286, 1986; Bogoczek R and E K Balawejder, 'Studies on a macromolecular dichloramine - the N,N-dichloro-poly(styrene-co-divinylbenzene)sulfonamide', *Angew Makromolec Chem*, **169**, 119, 1989
- Kanazawa A, T Ikeda and T Endo, 'Polymeric phosphonium salts as a novel class of cationic biocides. III. Immobilization of phosphonium salts by surface photografting and antibacterial activity of the surface-treated polymer films', *J Polym Sci. Part A: Polym Chem*, **31**, 1467, 1993
- Lambert J L, C T Fina and L R Fina, 'Preparation and properties of triiodide, penta iodide, and hepta iodide: Quaternary ammonium strong base anion-exchange resin disinfectants', *Ind Eng Chem Prod Res Dev*, **19**, 256, 1980; Hazziza-Laskar J, N Nurdin, G Helary and G Sauvet, 'Biocidal polymers active by contact. I. Synthesis of polybutadiene with pendant quaternary ammonium groups', *J Appl Polym Sci*, **50**, 651, 1993
- Sun G and X Xu, 'Durable and regenerable antibacterial finishing of fabrics: Fabric properties', *Text Chem Col*, **31**, 21, 1999
- Sun Y, T Y Chen, S D Worley and G Sun, 'Novel refreshable N-halamine polymeric biocides containing imidazolidin-4-one derivatives', *J Polym Sci. Part A: Polym Chem*, **39**, 3073, 2001
- Lin J, C Winkelmann, S D Worley, R M Broughton and J F Williams, 'Antimicrobial treatment of nylon', *J Appl Polym Sci*, **81**, 943, 2001
- Lin J, C Winkelmann, S D Worley, J Kim, C I Wei, U Cho, R M Broughton, J L Santiago and J F Williams, 'Biocidal polyester', *J Appl Polym Sci*, **85**, 177, 2002
- Elrod D B, J C Figlar, S D Worley, R M Broughton, J R Bickert, J L Santiago and J F Williams, 'A novel biocidal elastomer', *Rub Chem Tech*, **74**, 331, 2001
- Eknoian M W, S D Worley, J Bickert and J F Williams, 'Novel antimicrobial N-halamine polymer coatings generated by emulsion polymerisation', *Polym*, **40**, 1367, 1999

11. Sun G, W B Wheatley and S D Worley, 'A new cyclic N-halamine biocidal polymer', *Ind Eng Chem Res*, **33**, 168, 1994
12. Sun G, L C Allen, E P Luckie, W B Wheatley and S D Worley, 'Disinfection of water by N-halamine biocidal polymers', *Ind Eng Chem Res*, **34**, 4106, 1995
13. Sun G, T Y Chen, W B Wheatley and S D Worley, 'Preparation of novel biocidal N-halamine polymers', *J Bioact Compat Polym*, **10**, 135, 1995
14. Sun G, T Y Chen, M S Habercom, W B Wheatley and S D Worley, 'Performance of a new polymeric water disinfectant', *J Amer Water Res Assoc*, **32**, 793, 1996
15. Panangala V S, L Liu, G Sun, S D Worley and A Mitra, 'Inactivation of rotavirus by new polymeric water disinfectants', *J Virol Meth*, **66**, 263, 1997